

**SICHERHEITSANLEITUNG  
VI-200 MODULE**

- 1. EINGANGSSPANNUNG:** Der angegebene Wert ist die nominale Eingangs- Spannung. Vicor garantiert den Betrieb gemäss der Spezifikation.
- 2. MONTAGEPLATTE:** Die Montageplatte muss mit dem Schutzleiter verbunden werden. (Schutzklasse 1 Gerät)
- 3. MAX. MONTAGEPLATTE TEMPERATUR:** Diese sollte 85°C bei maximaler Last und Umgebungstemperatur nicht überschreiten. Die Temperatur wird in der mitte der Montageplatte gemessen.
- 4. EINSTELLUNG:** Stellen sie das Modul auf max. 110% der angegebenen Ausgangsspannung ein. Überschreiten sie nicht die max. Ausgangsleistung. Wenn sie die Ausgangsspannung zurücksetzen bleibt die maximale zulässige Ausgangsstrom erhalten.
- 5. ÜBERTEMPERATUR:** Bei einer Montageplattentemperatur von 90-95°C schaltet das Netzteil ab.
- 6. SICHERUNGEN:** Die DC-DC Netzteile sind wie folgt abzusichern:

Module Serie	Sicherung	Module Serie	Sicherung
VI-X7X-XX	BUSS PC-Tron 2.5A	VI-XNX-XX	8A/125V
VI-X8X-XX	BUSS PC-Tron 3A	VI-X2X-XX	8A/50V
VI-X5X-XX	BUSS PC-Tron 5A	VI-XWX-XX	12A/32V
VI-X7X-XX	BUSS PC-Tron 5A	VI-X1X-XX	12A/32V
VI-X4X-XX	BUSS PC-Tron 5A	VI-X0X-XX	12A/32V
VI-X3X-XX	8A/125V		

7. Weitere Informationen ueber den ordnungsgemässen Einsatz finden sie in unseren Applikations-Untertagen.

VICOR CORPORATION, Andover, MA U.S.A. Part #13794 Rev. A

**MODULE SAFETY INSTRUCTION SHEET**


- 1. INPUT VOLTAGE:** Nameplate rating is a Nominal Input Voltage. Vicor guarantees continuous operation per specifications.
- 2. BASEPLATE GROUNDING:** When baseplate is accessible, ground baseplate to earth/chassis ground.
- 3. MAX. BASEPLATE TEMPERATURE:** Keep temperature of baseplate to 85°C or less measured at the middle mounting slot on the module (negative pin side). Check temperature at maximum load and worst case ambient temperature.
- 4. TRIMMING:** Trim module to a maximum of +110% of rated output voltage. Do not exceed maximum power output of the module. When module is trimmed down, maximum current remains constant.
- 5. OVERTEMPERATURE SHUTDOWN:** If internal temperature of the module exceeds 90-95°C, the module will shut down. Cool down module and recycle input power to renewable module.
- 6. FUSING REQUIREMENTS:** To meet safety requirements, each module must be fused as follows:

Module Family	Fuse Required	Module Family	Fuse Required
VI-X7X-XX	Bus PC-Tron 2.5A	VI-XNX-XX	8A/125V
VI-X8X-XX	Bus PC-Tron 3A	VI-X2X-XX	8A/50V
VI-X5X-XX	Bus PC-Tron 5A	VI-XWX-XX	12A/32V
VI-X7X-XX	Bus PC-Tron 5A	VI-X1X-XX	12A/32V
VI-X4X-XX	Bus PC-Tron 5A	VI-X0X-XX	12A/32V
VI-X3X-XX	8A/125V		

7. Refer to Vicor's Application Manual for information on proper use of modules.

VICOR CORPORATION, Andover, MA U.S.A. Part #13794 Rev. A

**MECHANICAL DRAWING**

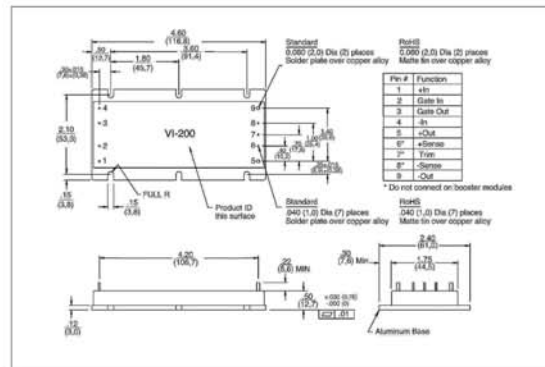

**EA Bezeichnung:**

**DC - DC Wandler 200 Watt  
Modul 264-33 VICOR  
Artikel-Nr.: 61100102**

Vorlage: intralqm-online/bf/bqmq4.2.3-2.dot  
Ersteller: P.Cyganek; Genehmigt: W.v.Bebber; Freigabe: Q  
Datum: 20.03.03

Ersteller	Genehmigt	Freigabe	Ablageort / Dateiname	Datum	Seite
P.Feiter	J.Davids		H:\dos4\grp61\xx100102\61100102_DB-EA_01.doc	22.07.08	1 / 1



# Data Sheet

## VI-200, VE-200

### DC-DC Converters

### 50 to 200 Watts



#### Features

- RoHS compliant (VE-200)
- Up to 50 W/in<sup>3</sup>
- cULus, cTUVus
- Up to 90% efficiency
- Size: 4.6" x 2.4" x 0.5" (116,8 x 61,0 x 12,7mm)
- Remote sense and current limit
- OVP, thermal shutdown
- Logic disable
- Wide range output adjust
- Compatible power booster modules
- ZCS power architecture
- Low noise FM control
- CE Marked

#### Product Highlights

The VI-200 family, with over 12 million units shipped, is Vicor's broad series of "zero-current-switching" component-level DC-DC converters.

Operating at frequencies up to 2 MHz, VI-200 family converters offer exceptional power density, efficiency, noise performance, reliability and ease of use. Booster modules (VI-Bxx) provide a simple, cost-effective, off-the-shelf solution for higher power output requirements. One or more boosters may be used to create synchronous arrays capable of supplying several kilowatts of output power.

The flexibility of Vicor's power components is also available in half-size, half-power VI-J00 MiniMods.

#### Packaging Options

SlimMods™, high power density, flangeless devices and FinMods™, featuring integral finned heatsinks.

**SlimMod:** Option suffix: - S

Example: VI - 2XX - XX - S

**FinMod:** Option suffix: - F1, - F2, - F3 or - F4

Examples:

VI - 2XX - XX - F1, 0.25" fins, longitudinal

VI - 2XX - XX - F2, 0.50" fins, longitudinal


VI - 2XX - XX - F3, 0.25" fins, transverse

VI - 2XX - XX - F4, 0.50" fins, transverse

**BusMod:** Option suffix: -B1

**MegaMod:** VI - LXX - XX

#### Converter Selection Chart



[a] E for RoHS compliant

#### Input Voltage

Nominal	Input Range Full Power	Max Power [b]	Low Line 75% Max Power	Transient [c]
0 = 12 V	10 – 20 V	(1)	n/a	22 V
V = 24 V	10 – 36 V	(7)	n/a	n/a
1 = 24 V	21 – 32 V	(4)	18	36 V
W = 24 V	18 – 36 V	(2)	n/a	n/a
2 = 36 V	21 – 56 V	(3)	18	60 V
3 = 48 V	42 – 60 V	(4)	36	72 V
N = 48 V	36 – 76 V	(4)	n/a	n/a
4 = 72 V	55 – 100 V	(4)	45	110 V
T = 110 V	66 – 160 V	(2)	n/a	n/a
5 = 150 V	100 – 200 V	(5)	85	215 V
6 = 300 V	200 – 400 V	(4)	170	425 V
7 = 150/300 V	100 – 375 V	(6)	90	n/a

[b] Maximum Power	5 V Outputs	>5 V Outputs	<5 V Outputs
(1)	75 W	75 W	15 A
(2)	150 W	150 W	30 A
(3)	100 W	100 W	20 A
(4)	200 W	200 W	40 A
(5)	150 W	200 W	40 A
(6)	75 W	100 W	20 A
(7)	50 W	75 W [d]	15 A

[c] Transient voltage for 1 second.

[d] X, V, and T outputs are 50 W max.

#### Output Voltage

Z = 2.0 V	2 = 15 V
Y = 3.3 V	N = 18.5 V
0 = 5.0 V	3 = 24 V
X = 5.2 V	L = 28 V
W = 5.5 V	J = 36 V
V = 5.8 V	K = 40 V
T = 6.5 V	4 = 48 V
R = 7.5 V	H = 52 V
M = 10 V	F = 72 V
1 = 12 V	D = 85 V
P = 13.8 V	B = 95 V

#### Product Grade Temperatures (°C)

Operating	Storage
E = -10 to +85	E = -20 to +100
C = -25 to +85	C = -40 to +100
I = -40 to +85	I = -55 to +100
M = -55 to +85	M = -65 to +100

Overtemperature shutdown 95°C typical (recycle power to restart)

#### Output Power/Current Vout

≥ 5 V	< 5 V
Y = 50 W	Y = 10 A
X = 75 W	X = 15 A
W = 100 W	W = 20 A
V = 150 W	V = 30 A
U = 200 W	U = 40 A

For additional output power use "Boosters".  
Change (VI-2xx-xx) to (VI-Bxx-xx)

## CONVERTER SPECIFICATIONS

(typical at  $T_{BP} = 25^{\circ}\text{C}$ , nominal line and 75% load, unless otherwise specified)

### INPUT SPECIFICATIONS

Parameter	VI-200 E-Grade			VI-200 C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Inrush charge		$120 \times 10^{-6}$		$120 \times 10^{-6}$	$200 \times 10^{-6}$		Coulombs	Nominal line
Input reflected ripple current – pp		10%		10%			$I_{IN}$	Nominal line, full load
Input ripple rejection		$25 + 20 \text{Log}\left(\frac{V_{in}}{V_{out}}\right)$		$30 + 20 \text{Log}\left(\frac{V_{in}}{V_{out}}\right)$			dB	120 Hz, nominal line
				$20 + 20 \text{Log}\left(\frac{V_{in}}{V_{out}}\right)$				2400 Hz, nominal line
No load power dissipation		1.35	2	1.35	2		Watts	

### OUTPUT CHARACTERISTICS

Parameter	VI-200 E-Grade			VI-200 C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Setpoint accuracy		1%	2%	0.5%	1%		$V_{NOM}$	
Load/line regulation			0.5%	0.05%	0.2%		$V_{NOM}$	LL to HL, 10% to Full Load
Load/line regulation			1%	0.2%	0.5%		$V_{NOM}$	LL to HL, No Load to 10%
Output temperature drift		0.02		0.01	0.02		% / $^{\circ}\text{C}$	Over rated temp.
Long term drift		0.02		0.02			%/1K hours	
Output ripple – pp:			150	60	100		mV	20 MHz bandwidth
			2 V, 3.3 V				$V_{NOM}$	20 MHz bandwidth
			5 V				$V_{NOM}$	20 MHz bandwidth
			3%	0.75%	1.5%		$V_{NOM}$	20 MHz bandwidth
Trim range <sup>[a]</sup>	50%		110%	50%	110%		$V_{NOM}$	
Total remote sense compensation	0.5			0.5			Volts	0.25 V max. neg. leg
OVP set point		125% <sup>[b]</sup>		115%	125% <sup>[b]</sup>	135%	$V_{NOM}$	Recycle power
Current limit	105%		135%	105%		125%	$I_{NOM}$	Automatic restart
Short circuit current <sup>[c]</sup>	20%		140%	20%		130%	$I_{NOM}$	

<sup>[a]</sup> 10 V, 12 V, 15 V outputs, and V input range (10 – 36 V) standard trim range  $\pm 10\%$ . Consult factory for wider trim range.  
3.3 V output trim range 2.20 to 3.63 V, 95 V output  $-50 + 0\%$  trim range.

<sup>[b]</sup> 131% nominal for booster modules.

<sup>[c]</sup> Output voltages of 3.3 V or 5 V incorporate foldback current limiting; all other outputs provide constant current limiting.

### CONTROL PIN SPECIFICATIONS

Parameter	VI-200 E-Grade			VI-200 C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Gate out impedance		50		50			Ohms	
Gate in impedance		1000		1000			Ohms	
Gate in open circuit voltage		6		6			Volts	Use open collector
Gate in low threshold	0.65			0.65			Volts	
Gate in low current			6			6	mA	
Power sharing accuracy	0.95		1.05	0.95		1.05		

## CONVERTER SPECIFICATIONS (cont.)

### ■ DIELECTRIC WITHSTAND CHARACTERISTICS

Parameter	VI-200 E-Grade			VI-200 C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Input to output	3,000			3,000			V <sub>RMS</sub>	Baseplate earthed
Output to baseplate	500			500			V <sub>RMS</sub>	
Input to baseplate	1,500			1,500			V <sub>RMS</sub>	

### ■ THERMAL CHARACTERISTICS


Parameter	VI-200 E-Grade			VI-200 C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Efficiency		78 – 88%			80 – 90%			
Baseplate to sink thermal impedance		0.07			0.07		°C/Watt	With Vicor P/N 20266
Thermal shutdown <sup>[d]</sup> (Drivers only)	90	95	105	90	95	105	°C	Cool and recycle power to restart

<sup>[d]</sup> No overtemp protection in booster modules.

### ■ MECHANICAL SPECIFICATIONS

Parameter	VI-200 E-, C-Grade			VI-200 I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Weight	6.2 (176)	6.3 (178)	6.4 (181)	7.2 (205)	7.3 (208)	7.4 (210)	Ounces (Grams)	

# MECHANICAL DRAWING

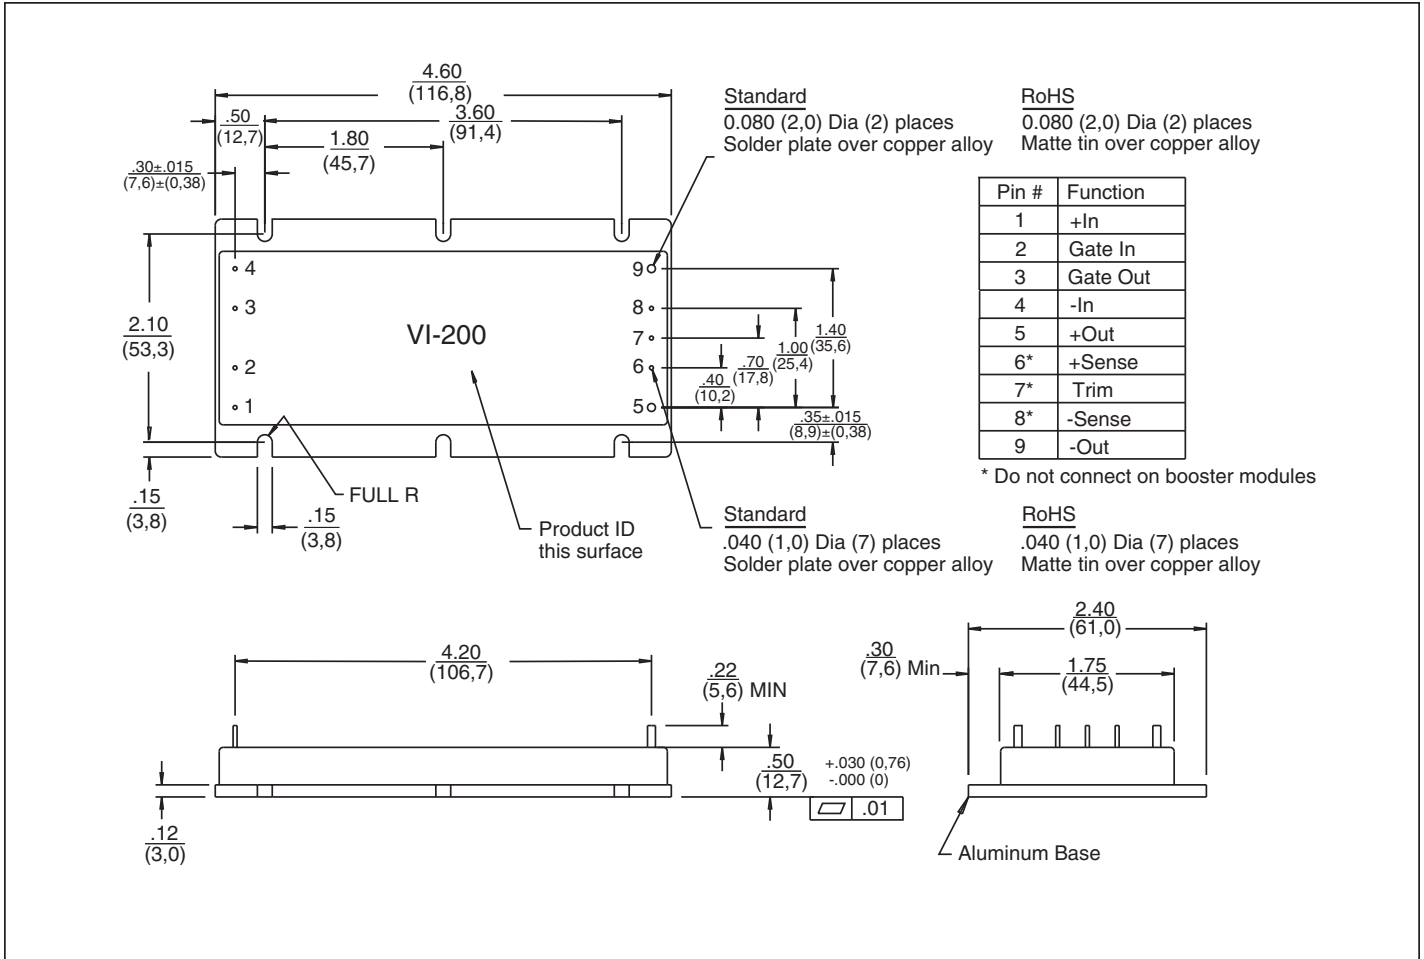

## **Warranty**

Vicor products are guaranteed for two years from date of shipment against defects in material or workmanship when in normal use and service. This warranty does not extend to products subjected to misuse, accident, or improper application or maintenance. Vicor shall not be liable for collateral or consequential damage. This warranty is extended to the original purchaser only.

EXCEPT FOR THE FOREGOING EXPRESS WARRANTY, VICOR MAKES NO WARRANTY, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Vicor will repair or replace defective products in accordance with its own best judgement. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

Information published by Vicor has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Vicor reserves the right to make changes to any products without further notice to improve reliability, function, or design. Vicor does not assume any liability arising out of the application or use of any product or circuit; neither does it convey any license under its patent rights nor the rights of others. Vicor general policy does not recommend the use of its components in life support applications wherein a failure or malfunction may directly threaten life or injury. Per Vicor Terms and Conditions of Sale, the user of Vicor components in life support applications assumes all risks of such use and indemnifies Vicor against all damages.

## **Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.**

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor components are not designed to be used in applications, such as life support systems, wherein a failure or malfunction could result in injury or death. All sales are subject to Vicor's Terms and Conditions of Sale, which are available upon request.

**Specifications are subject to change without notice.**

## **Intellectual Property Notice**

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. Interested parties should contact Vicor's Intellectual Property Department.

**Vicor Corporation**  
25 Frontage Road  
Andover, MA, USA 01810  
Tel: 800-735-6200  
Fax: 978-475-6715

### **email**

Customer Service: [custserv@vicorpower.com](mailto:custserv@vicorpower.com)  
Technical Support: [apps@vicorpower.com](mailto:apps@vicorpower.com)